

SAT Anywhere instructions

Router settings

To set up a home router, first login to the router management page, then find the DMZ settings page as shown in Figure 1.


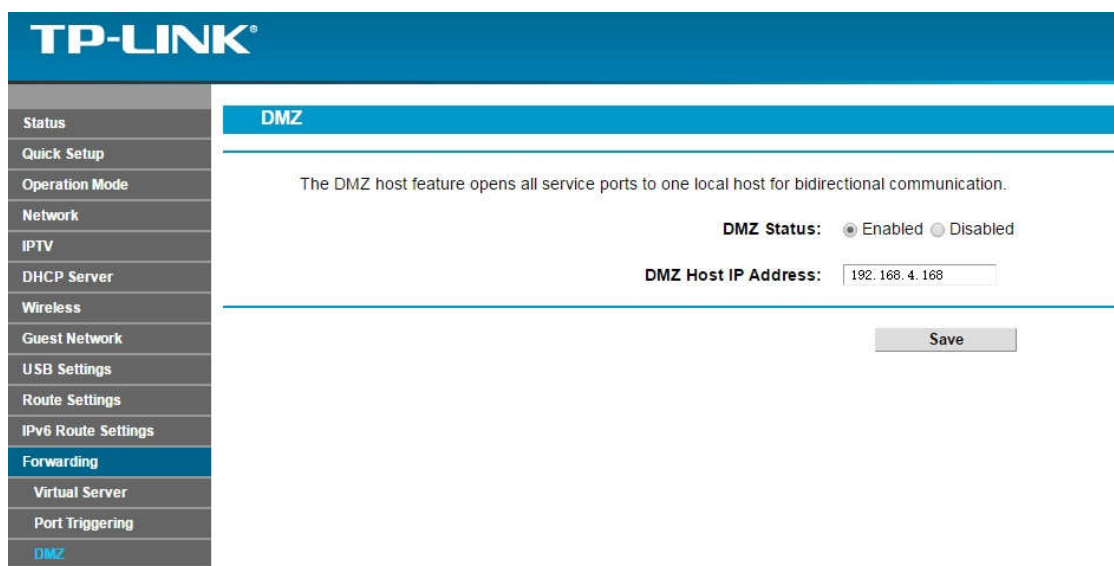


Figure 1

Enable DMZ function and set DMZ host IP to the address of your Smart S2 box. You can get the address of the box by DVBPlayer APP as shown in Figure 2.

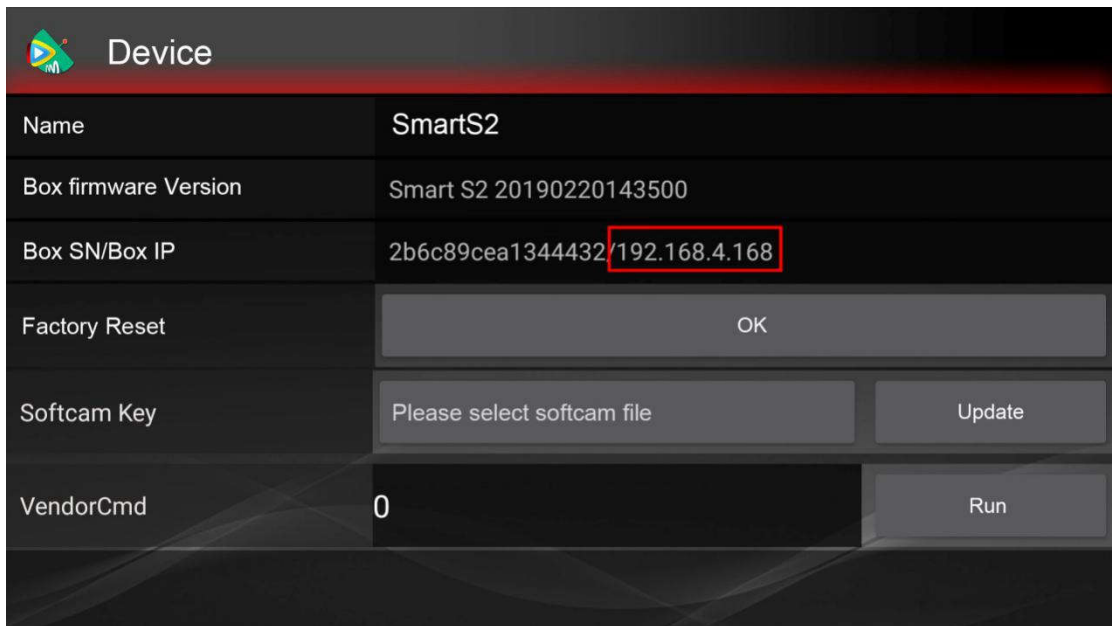

The image shows a 'Device' settings screen with a dark background and a red header bar. It contains several rows of settings, each with a label on the left and a value or control on the right. The 'Box SN/Box IP' row has a red box around the IP address '192.168.4.168'.

Device	
Name	SmartS2
Box firmware Version	Smart S2 20190220143500
Box SN/Box IP	2b6c89cea1344432/192.168.4.168
Factory Reset	OK
Softcam Key	Please select softcam file Update
VendorCmd	0 Run

Figure 2

APP settings

Click “SAT Anywhere” icon to enter SAT Anywhere menu.

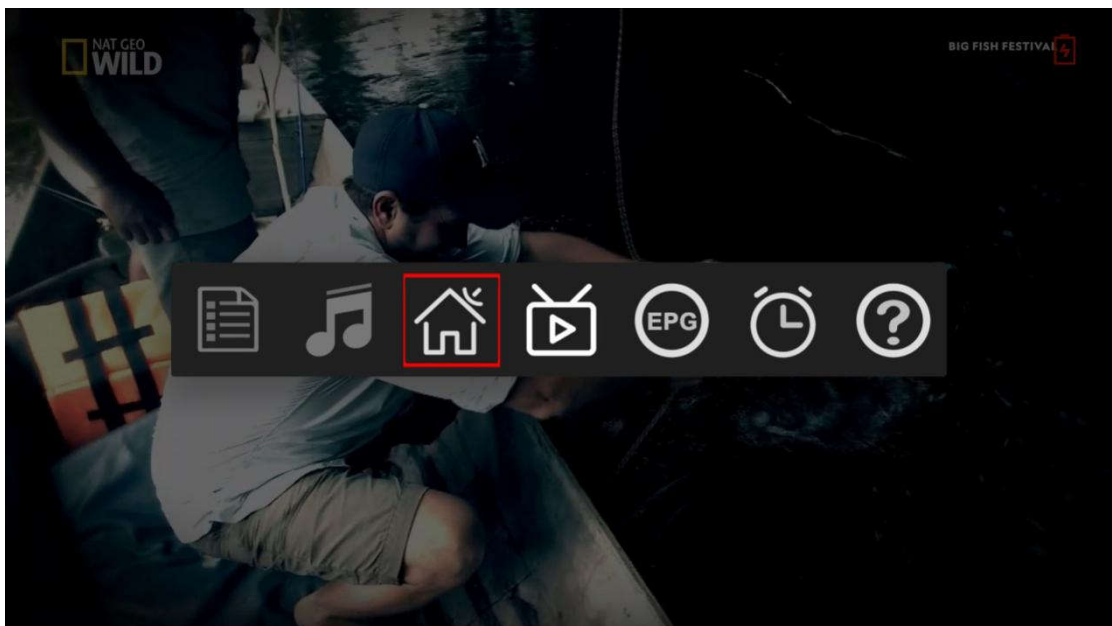


Figure 3

Your smart s2 box will be displayed on the first line with a "my" icon as shown in Figure 4.



Figure 4

When you are not at home, you can enjoy satellite programs over the Internet. Click on "connect" icon to connect the box in your home and play the program.

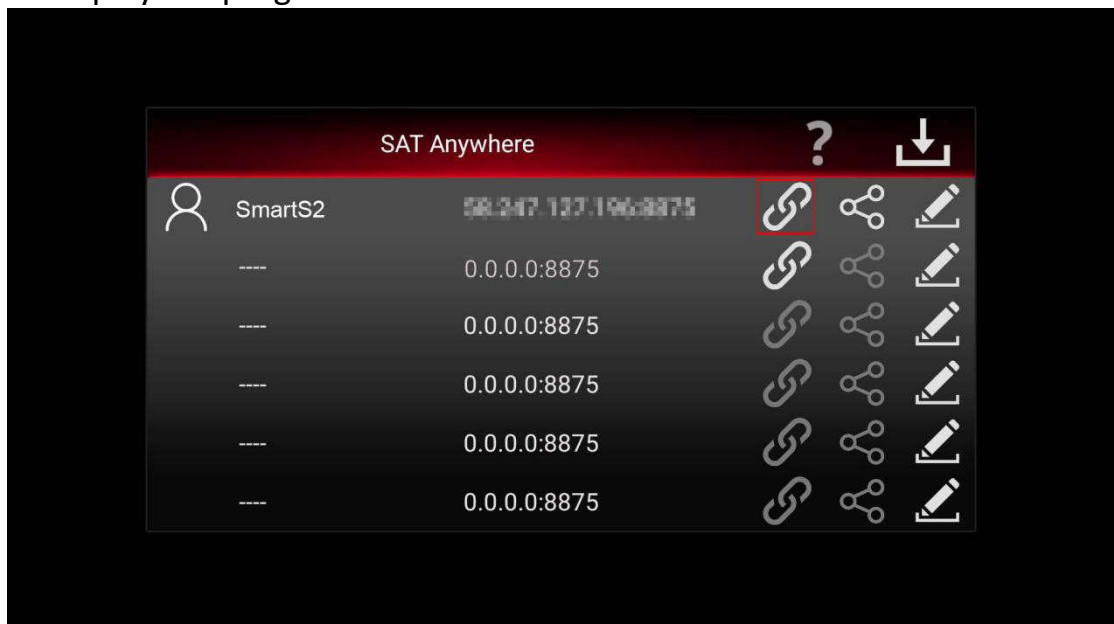


Figure 5

At the same time, you can also share your box with your friends anytime, anywhere. Click "share" icon and you will get a share code as shown in Figure 6 and Figure 7.

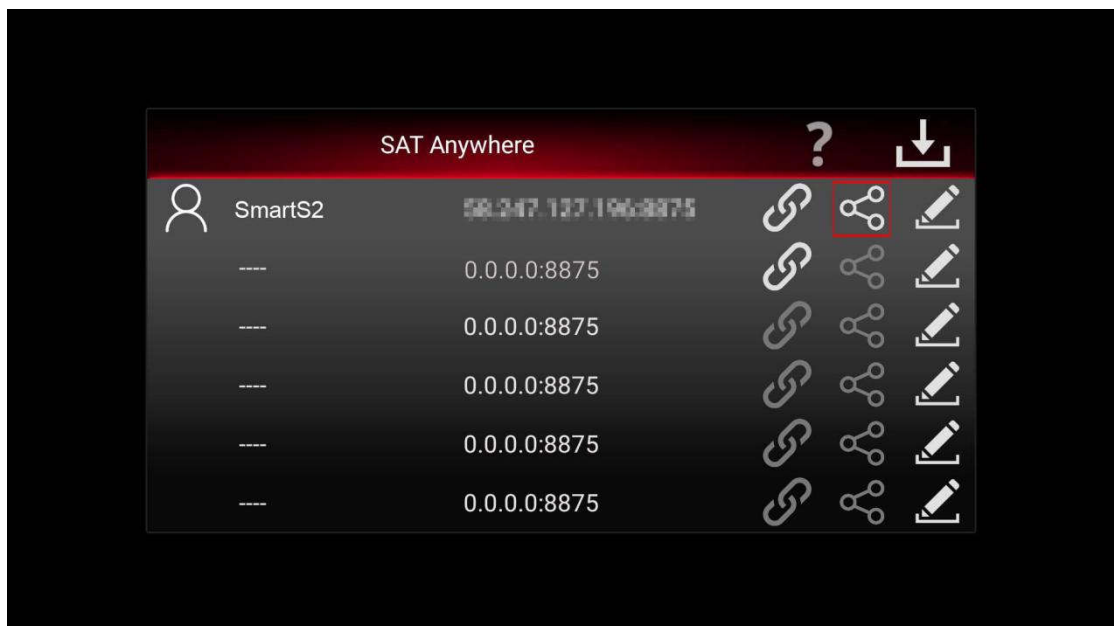


Figure 6

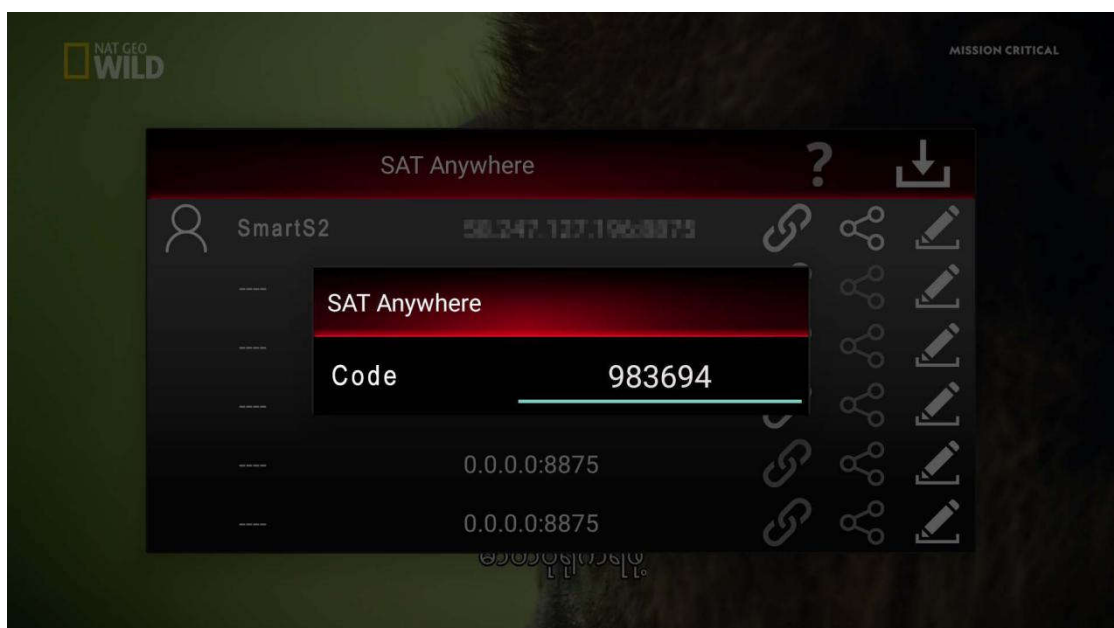


Figure 7

Share the code to your friends via instant messaging APP or other means. Now your friend needs to open the APP, click on “get” icon under SAT Anywhere menu, and enter the code as shown in Figure 8 and Figure 9.

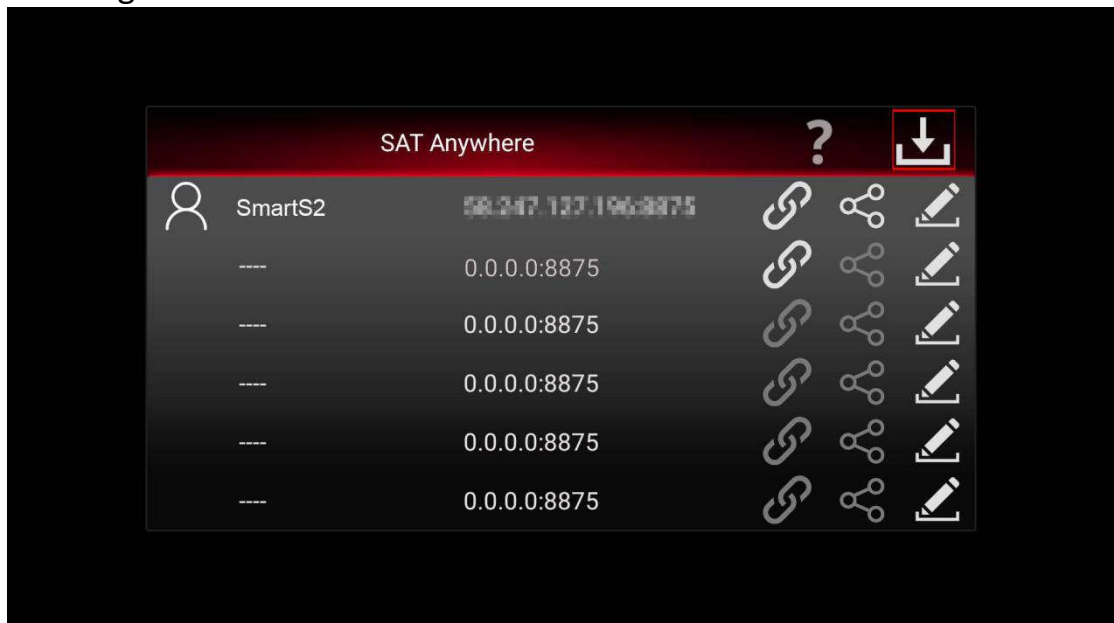


Figure 8

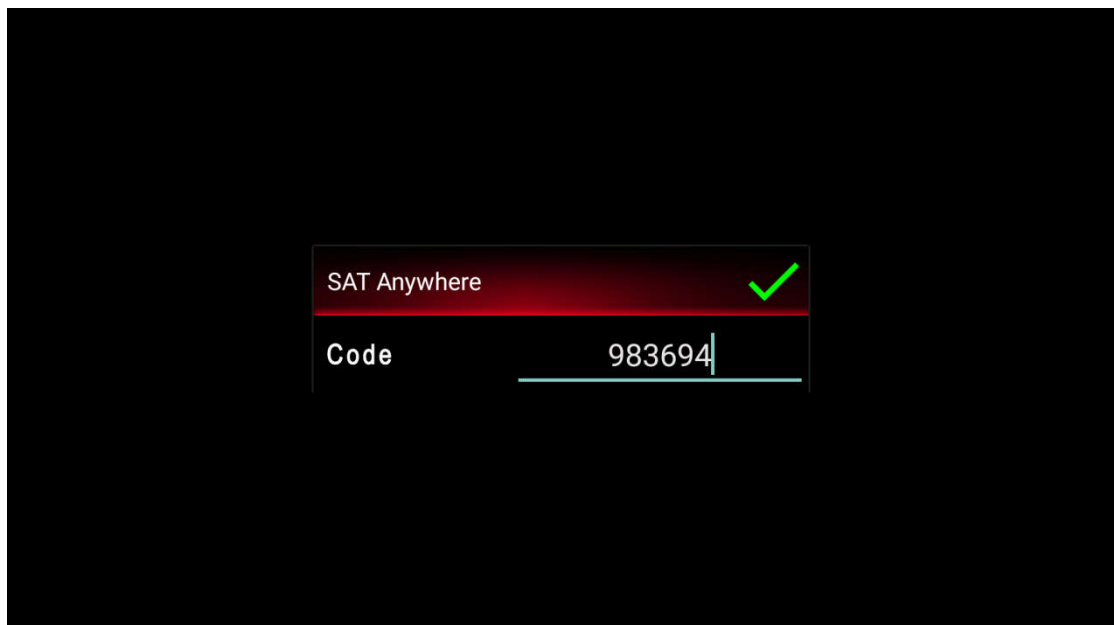


Figure 9

That's all, now your friends can connect your box to enjoy the program.

If you want to protect your box from being used by others, you can set a password for it. Click "Edit" icon and set the password as shown in Figures 10 and Figure 11.

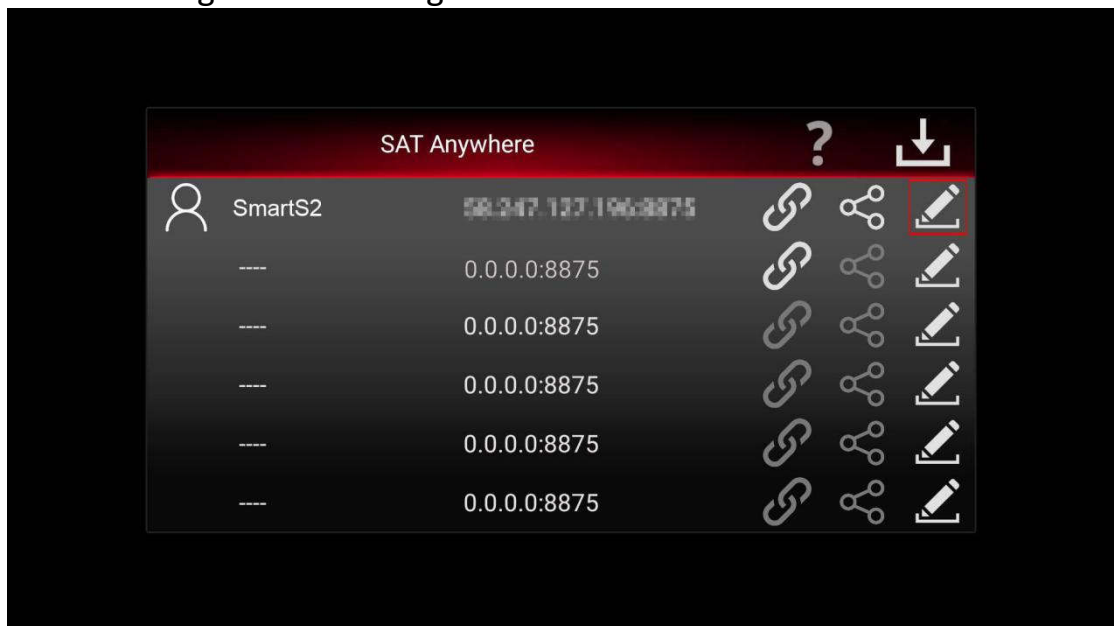


Figure 10

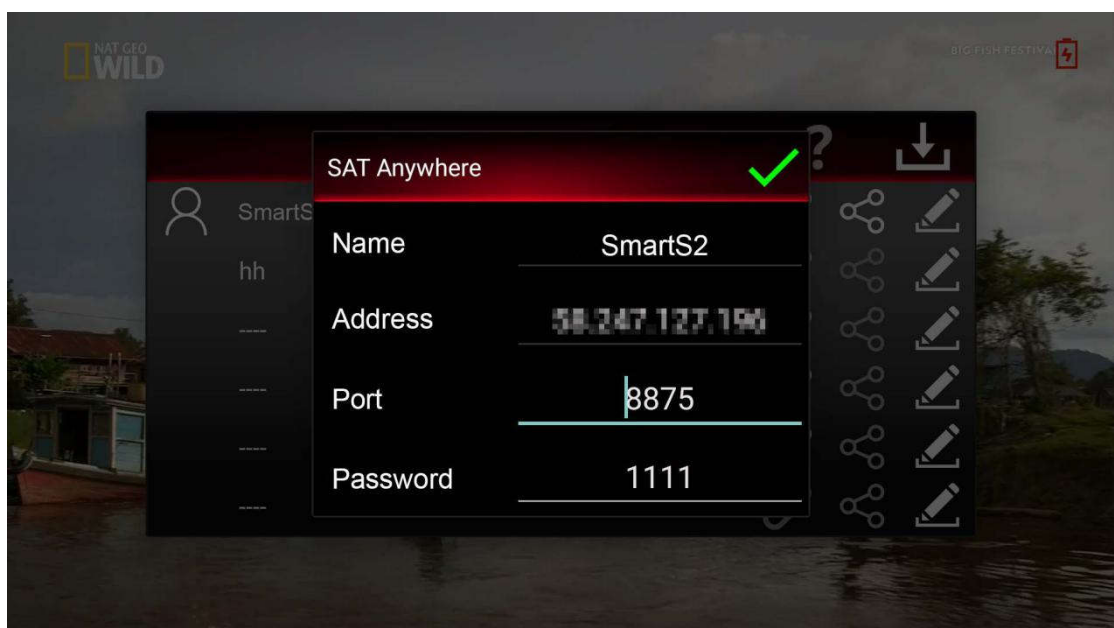


Figure 11